


CI 12 ADA 2ST D


- (A) 78"x24" radius LH
- (D) 78"x36" radius LH
- (E) 48"x24" radius LH

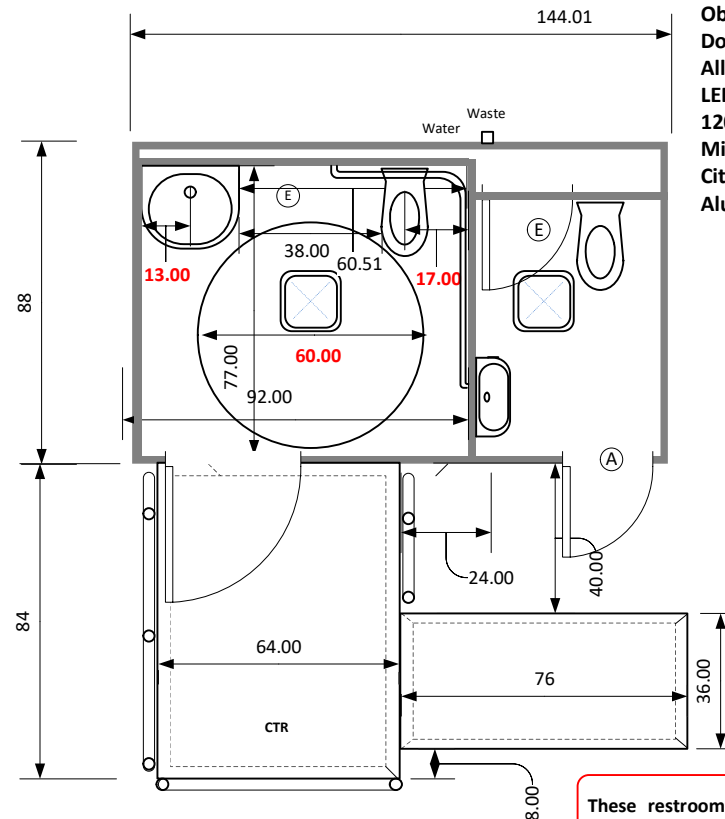

Direct Connect 3" sewer
 2 turbo vent fans or A/C
 1 ADA compliant restroom 1 Standard
 Commercial toilet & Large ADA wall hung sink
 Obscure skylight window in radius door
 Door closer & occupancy indicators
 All metal and composite construction
 LED 100,000 hour burn lighting
 120 VAC power requirement
 Mirror, soap, towel & tissue dispensers
 City water connection, outside faucet/drain
 Aluminum ADA ramps w/Stainless steel railings

For 1:24 slope
specify 2
ramps

Ramps have
 2" curbs
 Landing has
 optional curbs

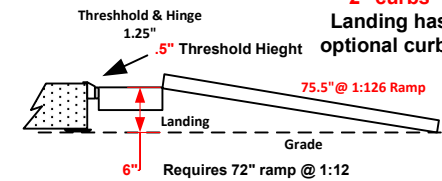

Handrails

Top Height 36" above Platform

Top of Cross Bars 14" below bottom of Top Rail. Railing
 1.5" OD Diameter and slides into 4" piece of 1.5" ID
 pipe welded to landing.

These restrooms are designed to be compliant with all current
 guidelines as we are aware of. Many guidelines have gray areas and
 points open to interpretation. Different entities may have differed
 interpretations or local differences. We suggest getting approvals of
 final plans from the authorities in the local the unit will be placed

This document is the property of and contains unpublished proprietary information and
 trade secrets of A.M.S. Global Inc. By accepting possession of the document the
 recipient agrees to make no copies transcriptions or any use of this document or the
 information contained herein except as authorized by A.M.S. Global Inc. and further
 agrees to safe keep this document and return it to A.M.S. Global Inc. upon demand.

Approved by

